


Locking Ladder Pull




Locking cylinder is small format interchangeable core (SFIC)
Less core

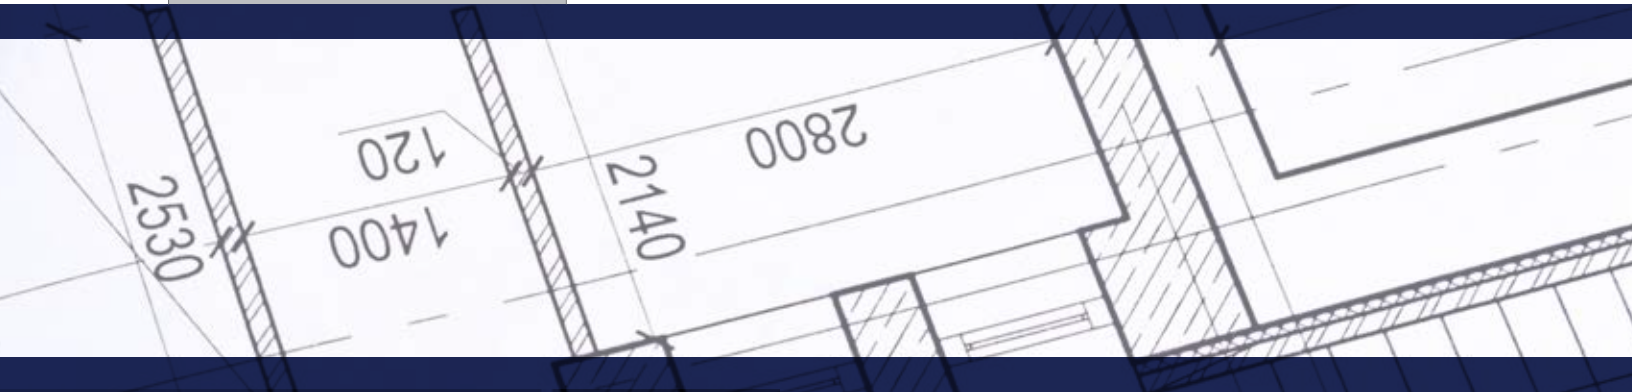

Includes dust proof strike

Model 160-HC

- Ladder pull locks into the floor
- Used for 1/2" or 3/4" (12mm-19mm) glass doors
- Lock operates at a comfortable 39 1/4" (997mm) above the floor
- 1-3/8" (35mm) diameter stainless steel pull
- Available in US32D (630) or US32 (629) finishes with other architectural finishes available upon request
- For use on both single and double door applications
- Custom sizes available upon request

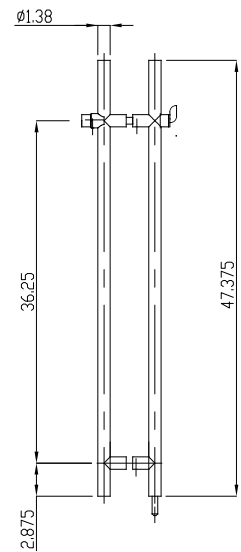

Easy to operate
Handicap (HC) Inside
Thumbturn.
ADA compliant