



LHSMC-410

Features

- ▶ Surface installed door co-ordinator for pairs of fire rated doors
- ▶ Purely mechanical door co-ordinator
- ▶ Non-handed
- ▶ Surface installation
- ▶ Ensures the correct sequence of door closing
- ▶ cUL listed for use with pair of swinging fire doors incorporating an astragal
- ▶ Up to 8' (2438mm) pairs of fire doors


Regulating Arm



Adjustable Length

Max 9.2" (234mm)

Min 7.7" (196mm)

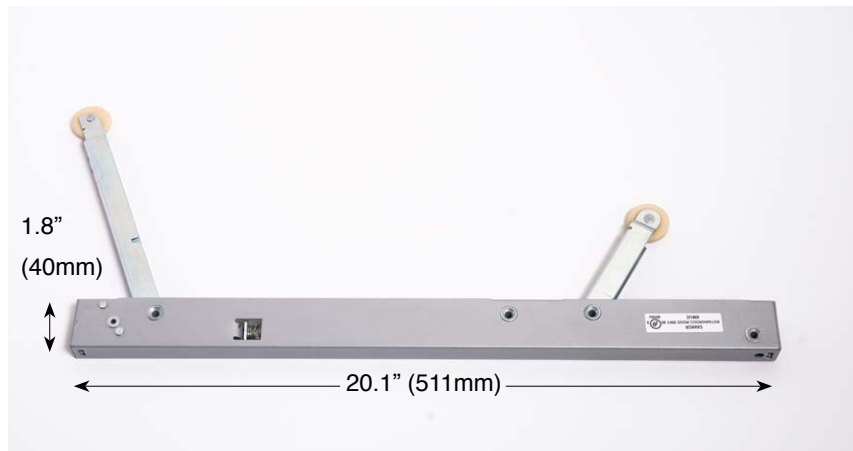

Inactive Arm

3.9" (99mm)



0.79" (20mm) Thick

FOR MORE VISIT US ONLINE