



HOW TO INSTALL DUMMY TRIM

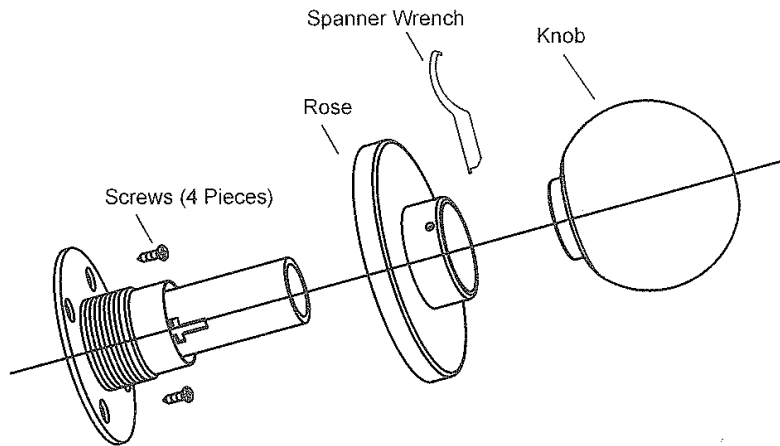

1. Place Chassis at proper position on the door and secure it with Mounting Screws.
2. Rotate Rose as desired and tighten securely by using the spanner wrench.
3. Push the Knob with Chassis.

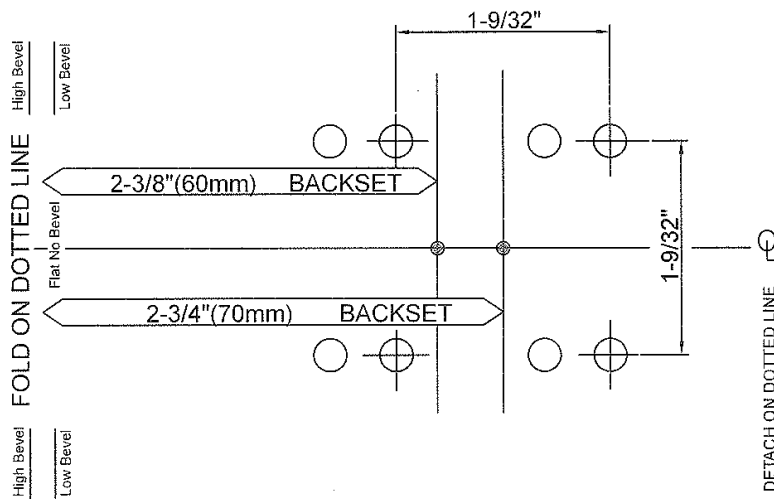

Not to Scale

The use of non-clutching impact drivers to install this hardware will automatically void the warranty.