



LHSMC-410

Features

- ▶ Surface installed door co-ordinator for pairs of fire rated doors
- ▶ Purely mechanical door co-ordinator
- ▶ Non-handed
- ▶ Surface installation
- ▶ Ensures the correct sequence of door closing
- ▶ cUL listed for use with pair of swinging fire doors incorporating an astragal
- ▶ Up to 8' (2438mm) pairs of fire doors


Regulating Arm



Adjustable Length


Max 9.2" (234mm)

Min 7.7" (196mm)

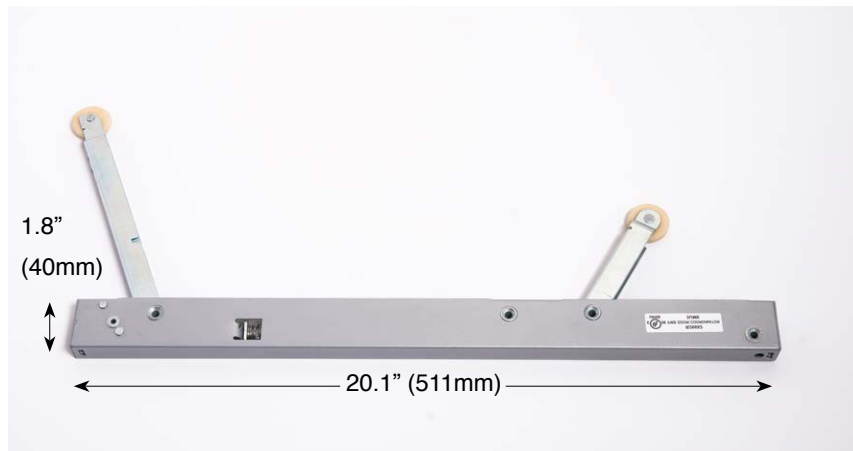

Inactive Arm

3.9" (99mm)

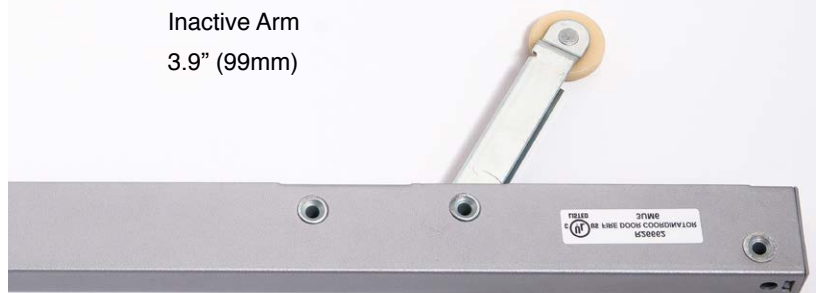

0.79" (20mm) Thick

FOR MORE VISIT US ONLINE

All product specifications are subject to change.