



**Locking Ladder Pull**

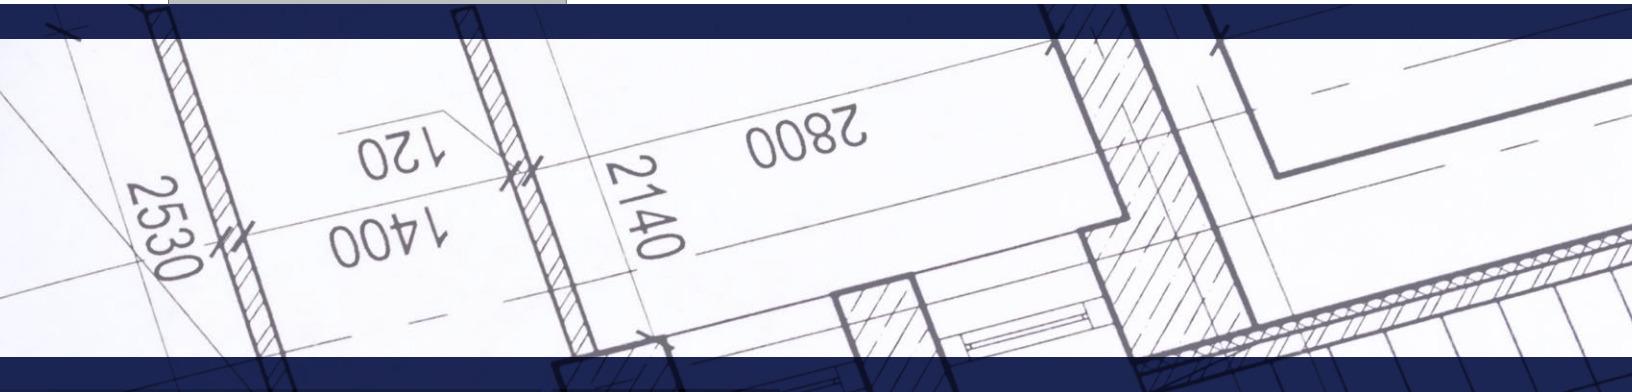

Locking cylinder is small format interchangeable core (SFIC)  
Less core

**Model 160-HC**

- Ladder pull locks into the floor
- Used for 1/2" or 3/4" (12mm-19mm) glass doors
- Lock operates at a comfortable 39 1/4" (997mm) above the floor
- 1-3/8" (35mm) diameter stainless steel pull
- Available in US32D (630) or US32 (629) finishes with other architectural finishes available upon request
- For use on both single and double door applications
- Custom sizes available upon request

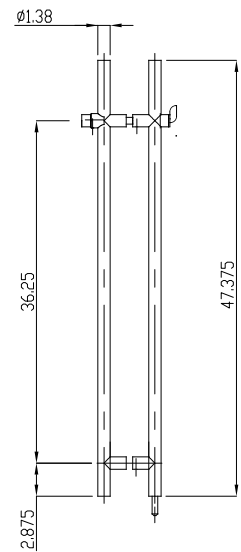

Includes dust proof strike



Easy to operate  
Handicap (HC) Inside  
Thumbturn.  
ADA compliant

All product specifications are subject to change.