


2000 Series Tubular

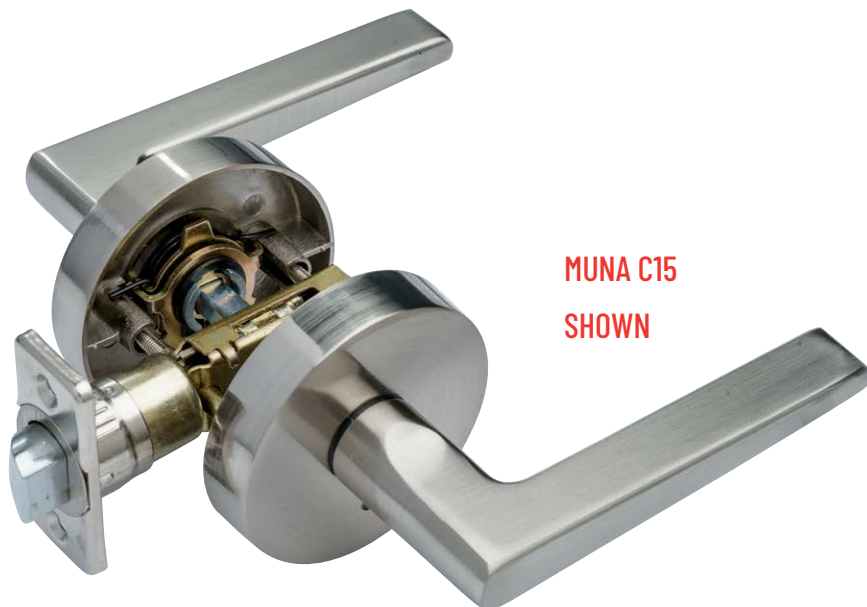

MUNA C15
SHOWN

APPLICATION

- Standard duty commercial and residential projects.
- Suitable for a variety of applications including offices, residential single family and multi-family applications

FEATURES

- Easy to install
- All metal construction

SPECIFICATIONS

Door Thickness	For Doors 1-3/8" (35mm) to 1-3/4" thick (45mm)
Backset	Adjustable to 2-3/8" (60mm) and 2-3/4" (70mm)
Strike	Full lip strike standard ("D" Strike)
Handing	LH2001, LH2022 - Passage and privacy sets are non handed
Latchbolt	1/2" (12.7mm)
Bore	Requires 2 1/8" Hole
Face Plate	Dual radius corner 1" X 2 1/4" face plate/drive in latch
Finish	C19(622), C15(619)
Rose	Round or Square (SQ)

2000 Series Functions

NON KEYED


PART NUMBER FUNCTION

LH2001	Passage
LH2022	Privacy
LH2093	Single Dummy (Ridged Trim)


2000 SERIES STANDARD LOCK FUNCTIONS

Illustration	Deadbolt Function	BHMA/ANSI Function #	Function	Description
	LH2001	F36	Passage	Latchbolt retracted by lever on either side
	LH2022	F37	Privacy	Push-Pin locks outside lever Turning inside lever or pushing emergency release unlocks outside lever Inside lever always active
	LH2093		Half Dummy Trim (Rigid)	Single dummy trim for one side of door Used for door pull as matching inactive trim


136 MUNA C15




423 MIRO C15




002 HOUSTON SQ C15




167 VANCOUVER C15



126 STELLA C19



119 LOGAN SQ C19



156 WINNIPEG C15

